# CL1220 - 2” LED Downlight

Date: _____ Job: _____ Type: _____

Notes: _____ Quantity: _____

The CL Series downlights are the original shallowest MR16 lamped downlight on the market. With a 2 1/2” depth they are perfect for drop ceilings, millwork or any place where ceiling space is limited. Lamped with Soraa LED lamps you can be ensured of the quality of light they will produce. The CL Series is IC and AirTight furthering the fixtures design flexibility.

## Technical Specifications:

| | |
|---|---|
| Input Voltage | 110-130VAC |
| Power Consumption - Soraa lamped | 7.5W |
| Lumens - Soraa lamped | 400 - 630lm |
| Color Temperatures - Soraa lamped | 2700K, 3000K, 4000K, |
| CRI - Sorraa lamped | 90 / 95 |
| R9 Value - Soraa lamped | 50 / 95 |
| LED Life | 35,000 hrs |
| Beam Angles - Soraa lamped | 10°, 25°, 36° |
| Tilt (Adjustable fixtures) | 35° |
| Dimming Type | ELV / Reverse Phase |
| Dimming Performance (Lutron DVELV) | 6% |
| Environment | Damp and Dry Location Rated |
| Ceiling Rating | IC & Airtight |
| Warranty | 2 years |

## Dimensions:

### CL1220

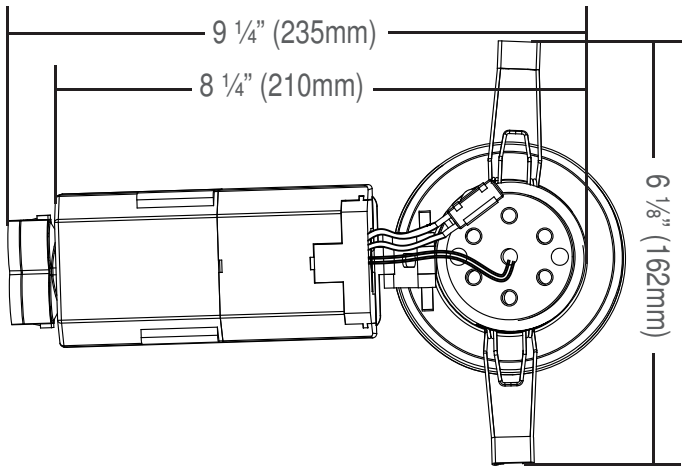


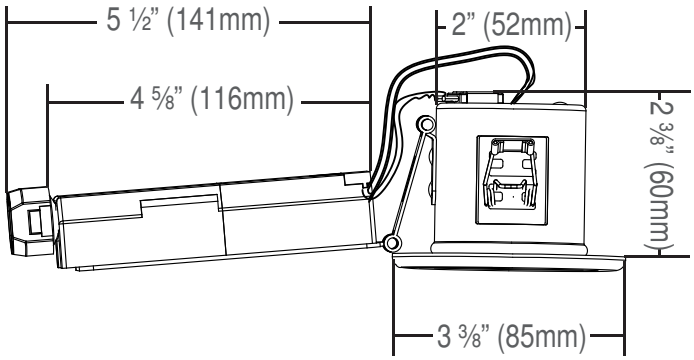


### CL1220TI/TIF

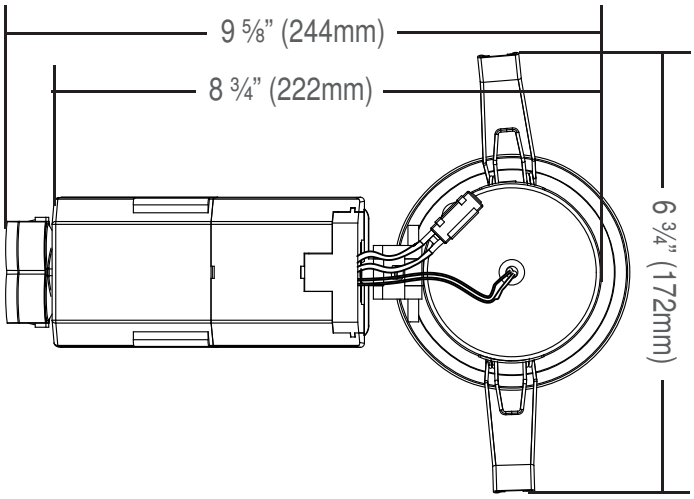


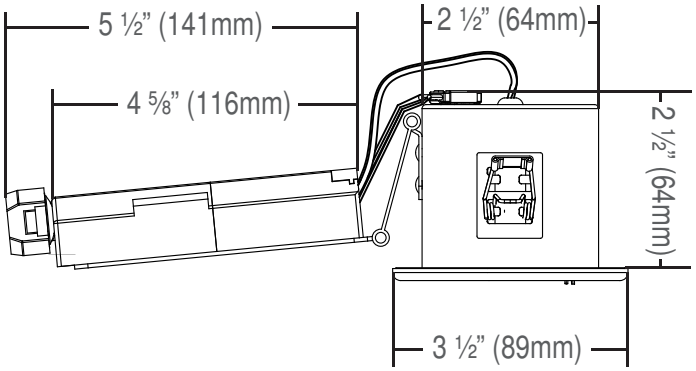


### CL1220TI/TIF

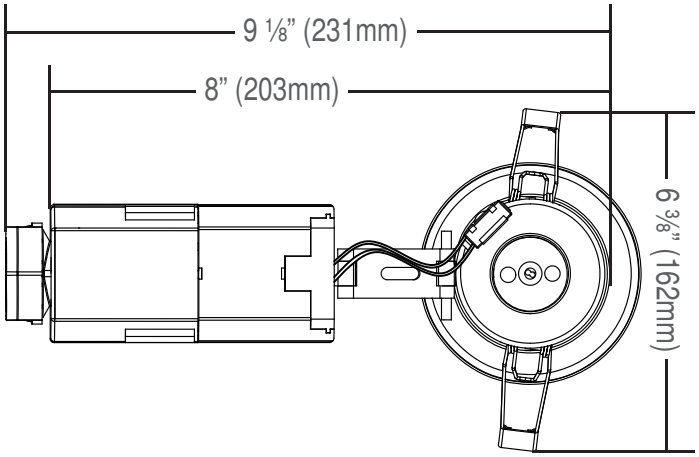


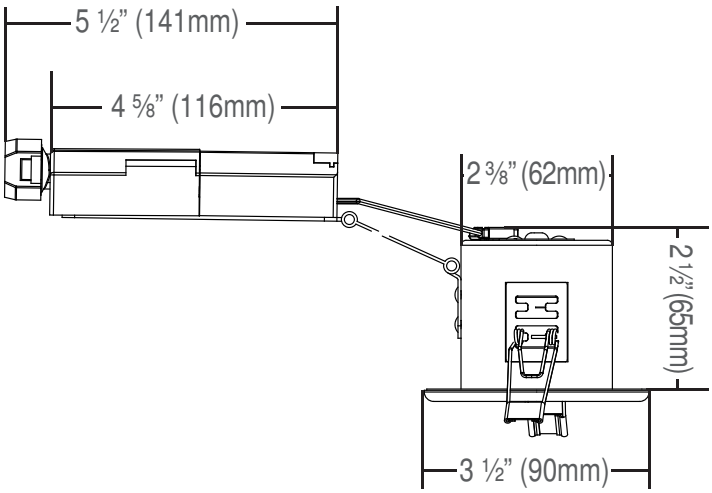

## Dimensions:

**CL1220TITL**

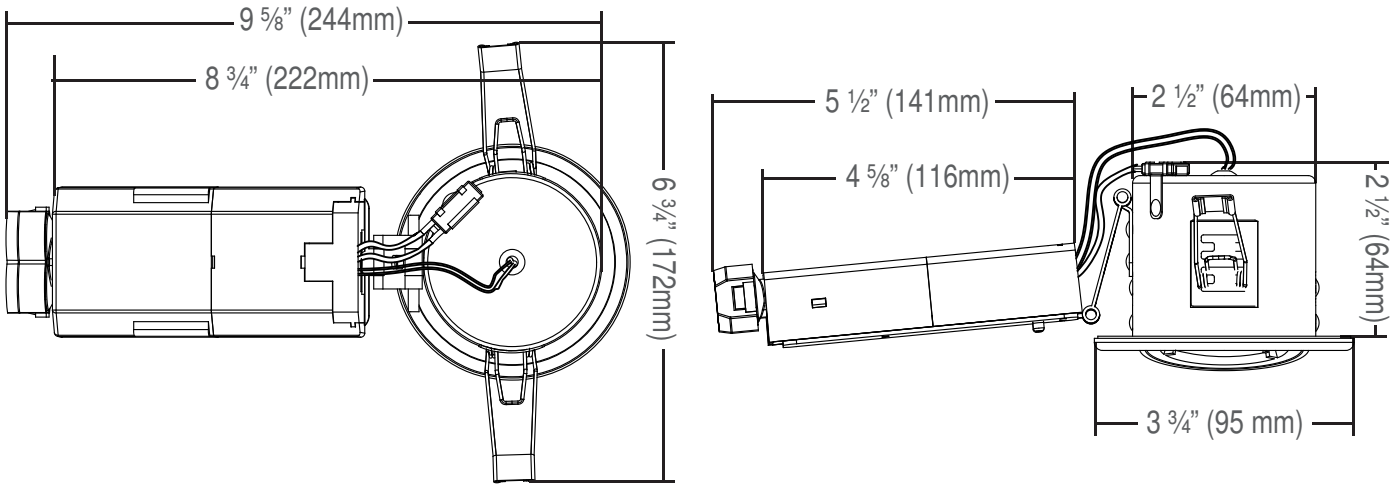


## Ordering Code:

**Fixture**

| CL1220 | – | - | – | - |
|---|---|---|---|---|

**TRIM**
- **-** - Round
- **TI** - Adjustable Round
- **TIF** - Adjustable Square
- **TL** - Round Twist Lock
- **TLF** - SquareTwist Lock
- **TITL** - Adjj. Round Twist Lock

**FINISH**
- **WH**- White
- **BS** - Brushed Steel
- **BL** - Black
- **CH** - Chrome
- **BZ** -Bronze

**Soraa Lamps**

WORKS WITH SORAA

Please go to www.soraa.com to see their latest lamp offering and part numbers.

## Accessories:

**New Construction Mounting Plates**
- - **NCMP 2500** - 2.50"
TL/TLF - **NCMP 2750** - 2.75"
TI/TIF - **NCMP 3000** - 3.00"
TITL - **NCMP 3125** - 3.125"

| NCMP | – | - |
|---|---|---|

**HOLE SIZE**
- **2500** - 2.50"
- **2750** - 2.75"
- **3000** - 3.00"
- **3125** - 3.125"

**Lensing**

**Wet Location Twist Lock - Shower lens**
TL/TLF - **WLTL-CLR/FR**

| WLTL | – | - |
|---|---|---|

**LENS**
- **CLR** - Clear
- **FR** - Frosted