


PROJECT	TYPE	NOTES
<p><b>PRODUCT SPECIFICATIONS</b></p> <p><b>Housing</b></p> <ul style="list-style-type: none"> <li>• Powder coated 316L stainless steel construction</li> <li>• No Insulation Contact (Non-IC) rated</li> <li>• Air tight as per ASTM E283 Standard</li> <li>• Approved for use in dry and damp locations</li> <li>• Approved for feed-through wiring</li> <li>• 4 1/4" housing depth</li> </ul> <p><b>Mounting</b></p> <ul style="list-style-type: none"> <li>• Installs into 3/8" - 1 1/4" ceiling thickness</li> <li>• Installs into 3" diameter hole</li> <li>• New Construction Mounting Plate (NCMP 3000) available. Comes with hanger bars.</li> <li>• <b>WARNING:</b> Cannot be directly covered in polycell spray-in foam insulation</li> </ul> <p><b>Trim</b></p> <ul style="list-style-type: none"> <li>• Round. Directional. Single gimbal 20° tilt</li> <li>• Powder coated. Brushed finish is sealed</li> <li>• Finishes available: Brushed Steel (BS), White (WH)</li> <li>• Lamp secured with wire retaining clip</li> </ul> <p><b>Lamp</b></p> <ul style="list-style-type: none"> <li>• 120V 50W max. GU10 based lamp</li> <li>• Recommended lamp: 120V 9W max. Sora LED lamp</li> <li>• Halogen alternative: 120V 50W max. aluminum backed lamp</li> </ul> <p><b>Warranty</b></p> <ul style="list-style-type: none"> <li>• Ten year Rust Free warranty</li> <li>• Two year warranty against manufacturer defects in material or workmanship. Please refer to our Terms of Sale for full warranty terms and conditions.</li> </ul>		




**PRODUCT FEATURES**

- 120V 50W max.
- Shallow 4 1/4" depth housing
- 10 year Rust Free warranty

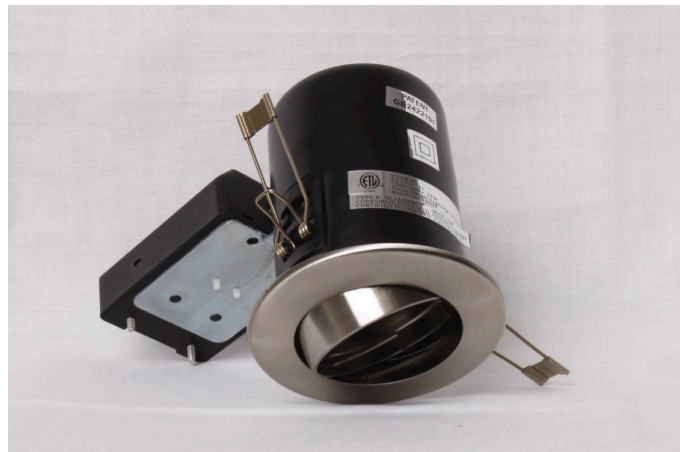


**PRODUCT DIMENSIONS**

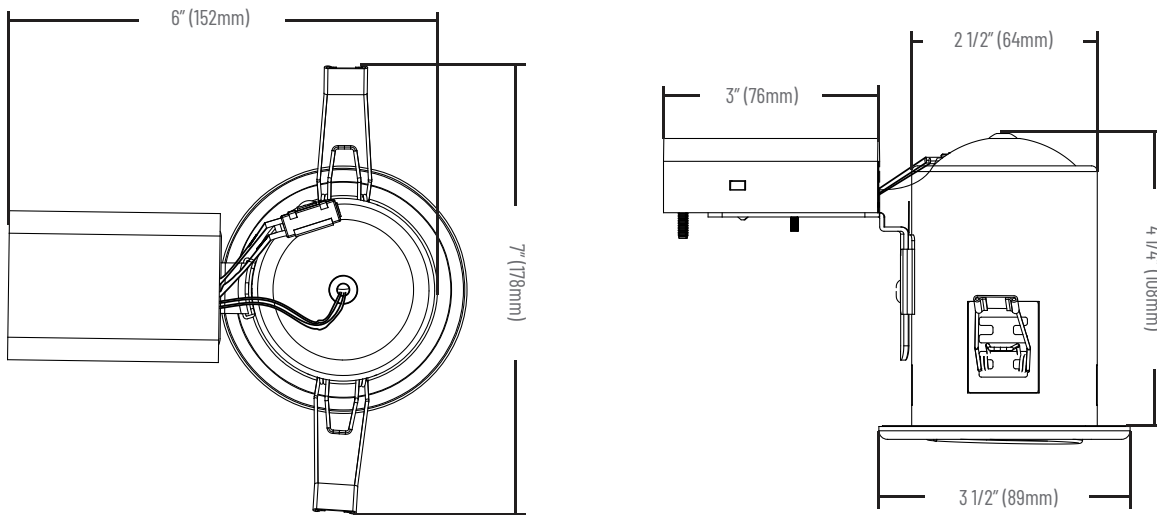

**ACCESSORIES**

**NCMP 3000** - New Construction Mounting Plate  
 Steel construction. 3" ø hole. Comes with hanger bars.

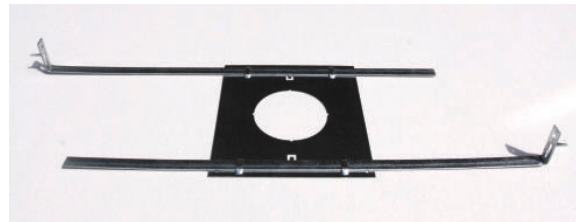

**ORDER CODE**

SL12050TI-SS		
<b>SL SERIES</b> 2" directional, round, downlight. Non-IC housing.	<b>TRIM FINISH</b> <b>BS</b> - Brushed Steel <b>WH</b> - White	<b>NEW CONSTRUCTION MOUNTING PLATE</b> <b>NCMP3000</b> - Includes mounting plate NCMP 3000

EG. SL12050TI-SS - BS - NCMP3000



**RECOMMENDED SORAA LEDS - SORAA VIVID 95 CRI\***

MODEL	CCT (K)	BEAM (°)	POWER (W)	LUMENS (LM)	CBCP
SM16GA-09-25D-927-03	2700K	25°	9W	465	2570
SM16GA-09-36D-927-03	2700K	36°	9W	465	1210
SM16GA-09-60D-927-03	2700K	60°	9W	465	470
SM16GA-09-25D-930-03	3000K	25°	9W	490	2700
SM16GA-09-36D-930-03	3000K	36°	9W	490	1280
SM16GA-09-60D-930-03	3000K	60°	9W	490	500

**RECOMMENDED SORAA LEDS - SORAA BRILLIANT 85 CRI\***

MODEL	CCT (K)	BEAM (°)	POWER (W)	LUMENS (LM)	CBCP
SM16GA-09-25D-827-03	2700K	25°	9W	560	3090
SM16GA-09-36D-827-03	2700K	36°	9W	560	1460
SM16GA-09-60D-827-03	2700K	60°	9W	560	570
SM16GA-09-25D-830-03	3000K	25°	9W	590	3260
SM16GA-09-36D-830-03	3000K	36°	9W	590	1540
SM16GA-09-60D-830-03	3000K	60°	9W	590	600

**COMPATIBLE DIMMERS\***

Full lists of dimmer compatibility data are available at <https://www.soraa.com/resources/compatibility>

