

PROJECT	TYPE	NOTES
<p>OVERVIEW</p> <p>The TL120NEON-SB uses high efficacy LED chips to produce outstanding illumination. There are CRI options of 80+ and 90+, meeting your color rendering requirements. The color uniformity is further ensured by 3-step MacAdam ellipse binning. Maximum run for the TL120NEON-SB is 164ft. Dotless and diode free imaging is guaranteed.</p>		




TECHNICAL SPECIFICATIONS

Operating Voltage	120VAC
Power Consumption	4.2W/ft
Lumens (4000K - 80+/90+ CRI)	120lm/ft / 100lm/ft
Efficacy (4000K - 80+/90+ CRI)	29lm/W / 24lm/W
Beam Spread	120°
Color Temperatures	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
CRI	80+ / 90+
LED Life	50,000 hrs
Cuttible Increments	12"
Maximum Run Length	164'
Warranty	5 years
Certification	cETLus - UL2388 (plug) / UL1598 (hard wire)




DIMENSIONS


TL120NEON-SB-PFIP - Power feed inline plug

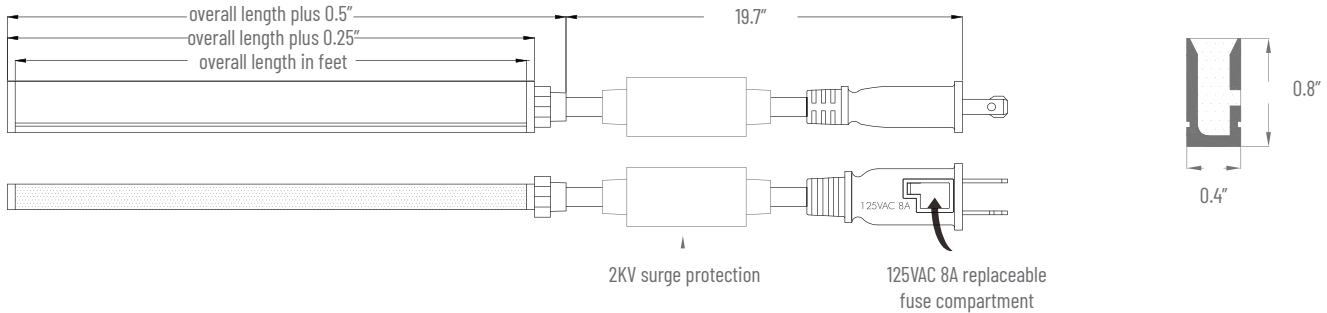


TL120NEON-SB-PFSP - Power feed side plug

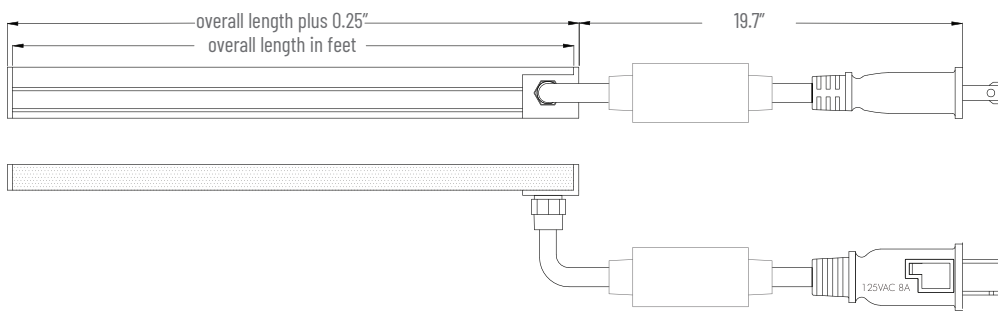


TL120NEON-SB-PFIH - Power feed inline hardware

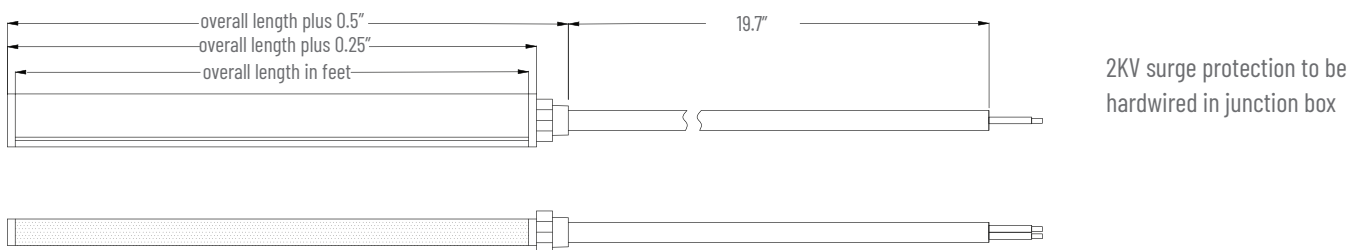



TL120NEON-SB-PFSH - Power feed side inline hardware

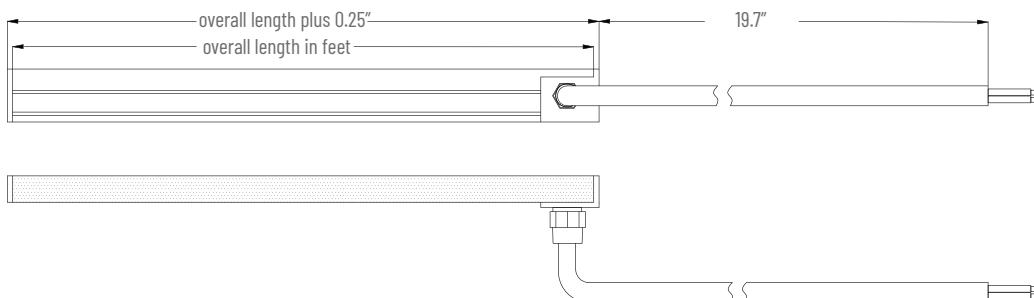



ACCESSORIES / INSTALLATION

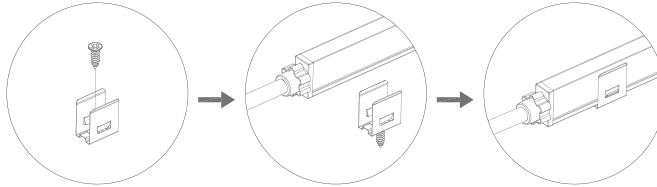



TL120NEON-SB-SSC -Stainless steel mounting clip (one clip per foot)

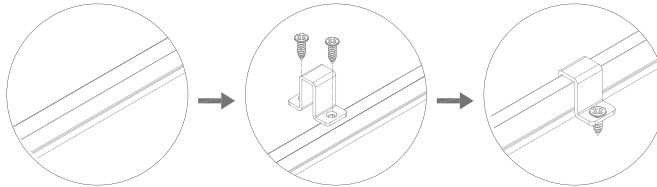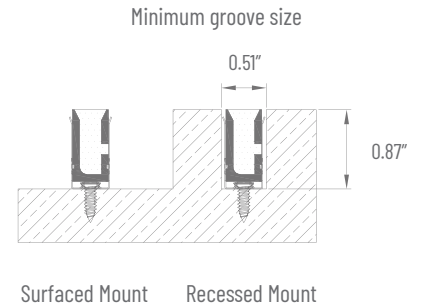


TL120NEON-SB-PCC -Polycarbonate mounting clip (one clip per foot)

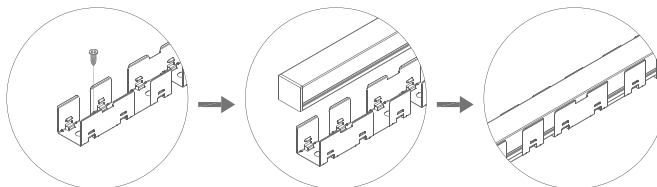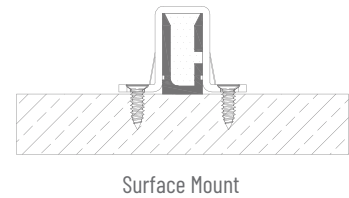




TL120NEON-SB-SST -Stainless steel bendable track (1M)

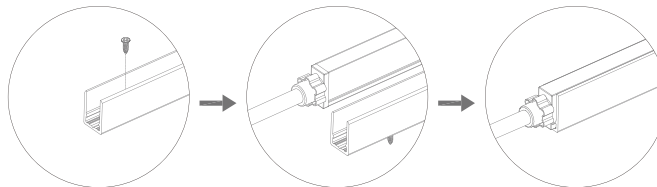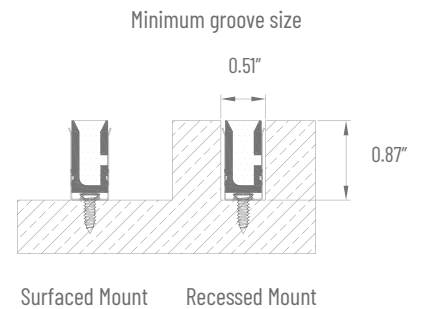


TL120NEON-SB-AC -Aluminum mounting channel



ACCESSORIES / INSTALLATION

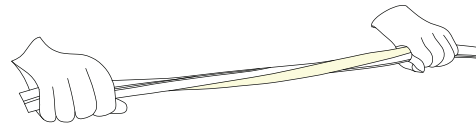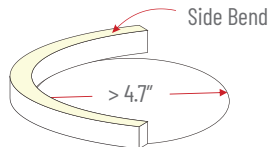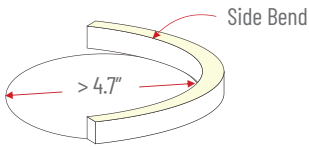

▲ Maximum twist is 360° per 3.28ft



No top bending

ORDER CODE

TL120NEON	SB	-	-	-
-----------	----	---	---	---

CRI / CCT

- 827 - 80+ / 2700K
- 830 - 80+ / 3000K
- 835 - 80+ / 3500K
- 840 - 80+ / 4000K
- 850 - 80+ / 5000K
- 865 - 80+ / 6500K
- 927 - 90+ / 2700K
- 930 - 90+ / 3000K
- 935 - 90+ / 3500K
- 940 - 90+ / 4000K
- 950 - 90+ / 5000K
- 965 - 90+ / 6500K

POWER FEED

- PFIP - Inline Plug
- PFSP - Side Plug
- PFIH - Inline Hardwire
- PFSH - Side Hardwire

ROLL LENGTH

- 50 - 50M (164ft)
- XX - Custom

